


Taborsky


Trapezoid profiles, corrugated profiles, roof tiles

Façade profiles

■ Meander profiles

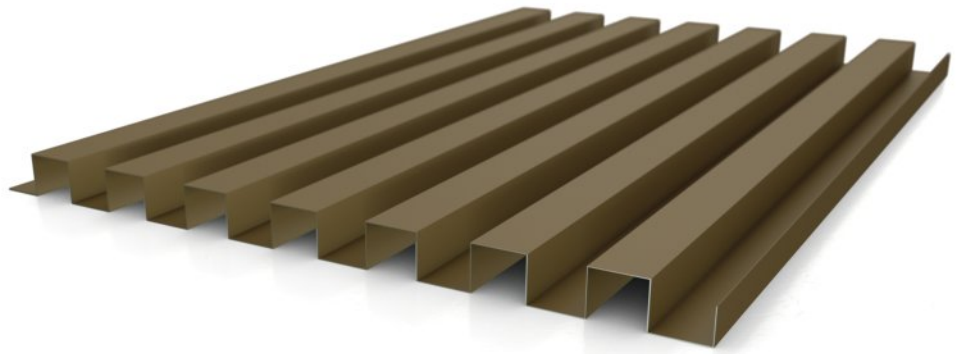

■ Sawtooth profiles

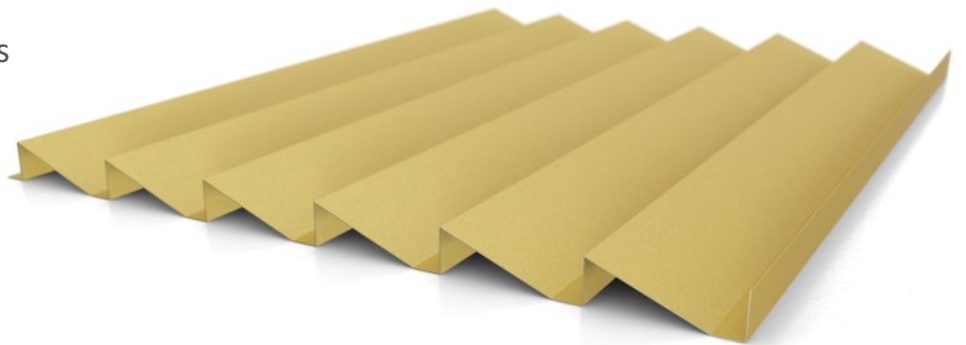


■ Special profiles



■ Pointed profiles



■ Trapezoidal profiles

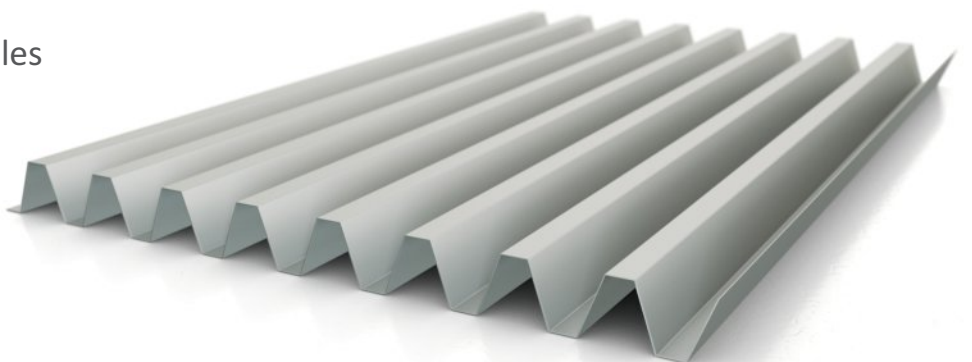

Inhalt	Seite
1. Façade profiles	04 - 09
2. Perforated profiles	10
3. Conical profiles	11
4. Materials, surfaces, colours	12 - 13
5. Connecting and end profiles	14
6. General information	15


Taborsky façade profiles have been specially developed for use as mounted, rear-ventilated façades. The wide variety of profiles means that customer-specific façade solutions can be developed. Our façade profiles include meander, pointed, sawtooth, trapezoidal and special profiles. In addition to 60 standard profiles, profiles can also be manufactured to order. Individual conical profiles can also be made. This means that almost no limits apply to your design freedom for mounted, rear-ventilated façades.

The unique nature of the Taborsky façade profiles is especially clear through the combination of the profiles with differing high-quality materials and various surfaces and colours.

The flexibility of the Taborsky façade profiles means that additional areas of application are also possible. The profiles can also be used as garden fences, for example. The façade profiles can also be used indoors as wall cladding and as soffits.


Taborsky meander profile F.MP 17/33

Spacing: 33mm	Overall width: 591mm
Height: 17mm	Length: 300-6.000mm

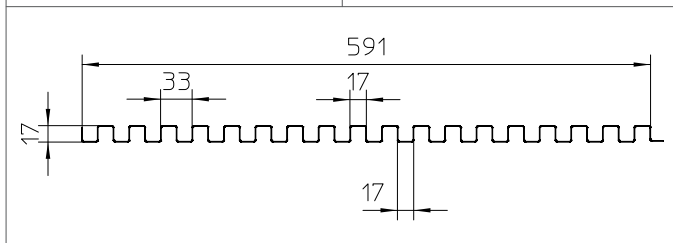


Taborsky meander profile F.MP 21/41

Spacing: 41mm	Overall width: 608mm
Height: 21mm	Length: 300-6.000mm

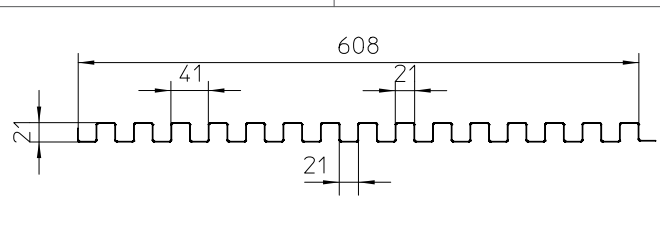


Taborsky meander profile F.MP 21/130

Spacing: 130mm	Overall width: 907mm
Height: 21mm	Length: 300-6.000mm

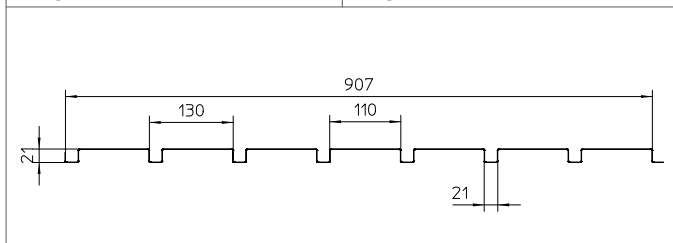


Taborsky meander profile F.MP 30/61

Spacing: 61mm	Overall width: 606mm
Height: 30mm	Length: 300-6.000mm

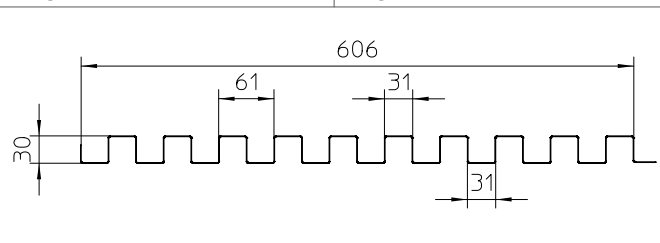


Taborsky meander profile F.MP 30/61.120

Spacing: 61/120mm	Overall width: 720mm
Height: 30mm	Length: 300-6.000mm

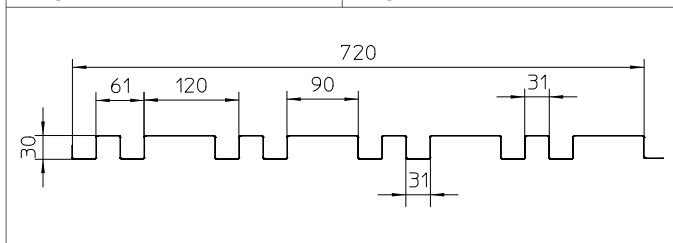


Taborsky meander profile F.MP 30/90

Spacing: 90mm	Overall width: 716mm
Height: 30mm	Length: 300-6.000mm

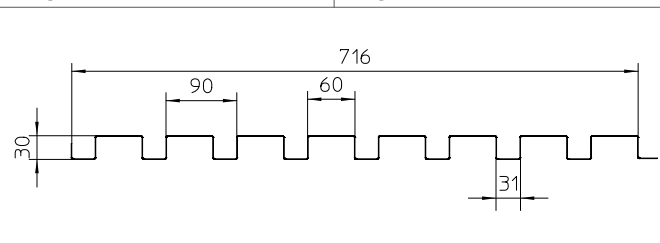


Taborsky meander profile F.MP 38/93

Spacing: 93mm	Overall width: 684mm
Height: 38mm	Length: 300-6.000mm

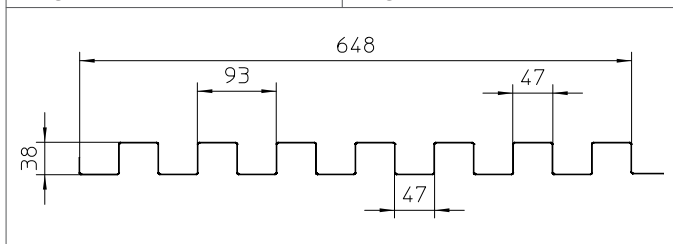


Taborsky meander profile F.MP 38/94

Spacing: 94mm	Overall width: 655mm
Height: 38mm	Length: 300-6.000mm

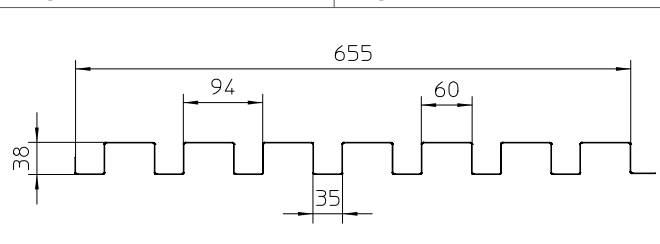


Taborsky meander profile F.MP 39/74.104.184

Spacing: 74/104/184mm	Overall width: 721mm
Height: 39mm	Length: 300-6.000mm

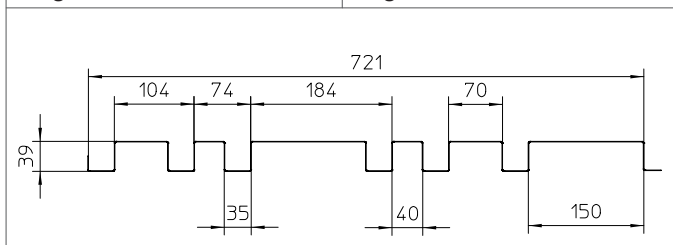


Taborsky meander profile F.MP 53/93

Spacing: 93mm	Overall width: 555mm
Height: 53mm	Length: 300-6.000mm

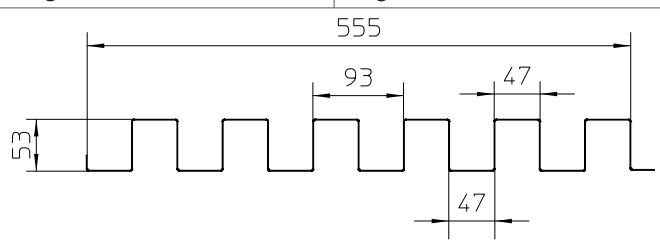


Taborsky sawtooth profile F.ZP 25/68

Spacing: 68mm	Overall width: 816mm
Height: 25mm	Length: 300-6.000mm

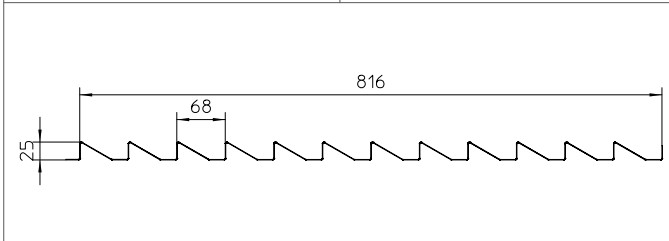


Taborsky sawtooth profile F.ZP 25/89

Spacing: 89mm	Overall width: 885mm
Height: 25mm	Length: 300-6.000mm

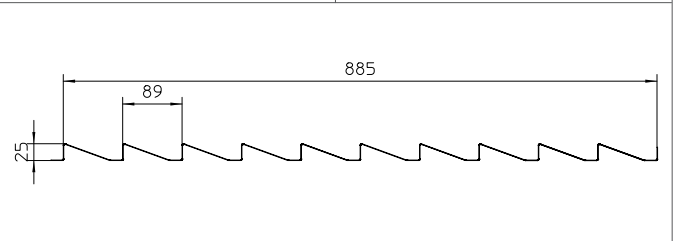


Taborsky sawtooth profile F.ZP 35/110

Spacing: 110mm	Overall width: 881mm
Height: 35mm	Length: 300-6.000mm

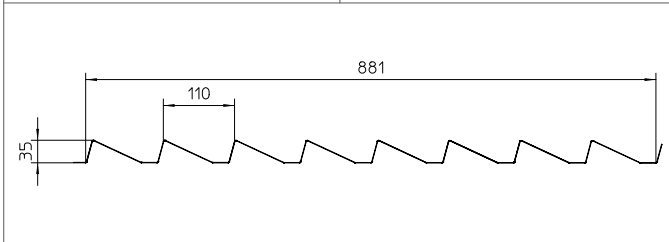


Taborsky sawtooth profile F.ZP 40/115

Spacing: 115mm	Overall width: 802mm
Height: 40mm	Length: 300-6.000mm

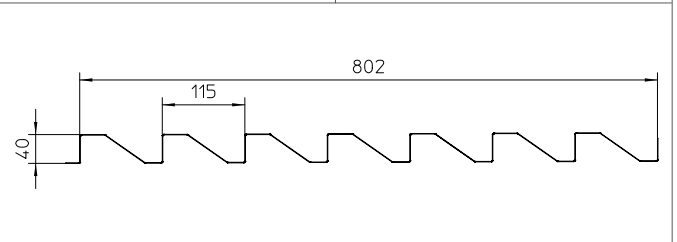


Taborsky sawtooth profile F.ZP 40/117

Spacing: 117mm	Overall width: 820mm
Height: 40mm	Length: 300-6.000mm

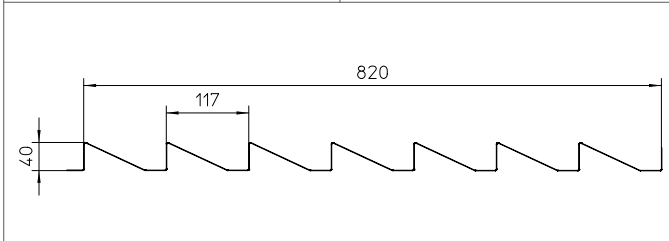


Taborsky sawtooth profile F.ZP 50/134

Spacing: 134mm	Overall width: 801mm
Height: 50mm	Length: 300-6.000mm

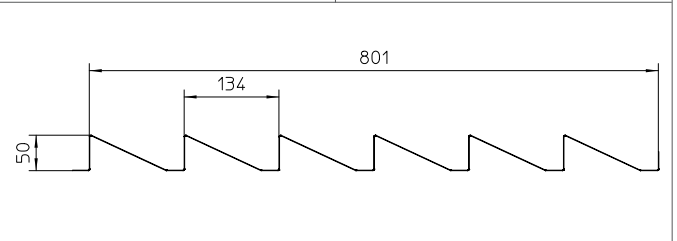


Taborsky sawtooth profile F.ZP 70/127

Spacing: 127mm	Overall width: 637mm
Height: 70mm	Length: 300-6.000mm

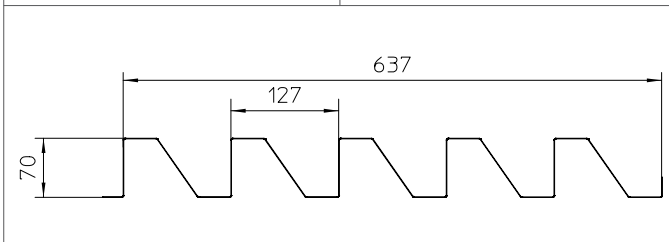


Taborsky sawtooth profile F.ZP 70/147

Spacing: 147mm	Overall width: 733mm
Height: 70mm	Length: 300-6.000mm

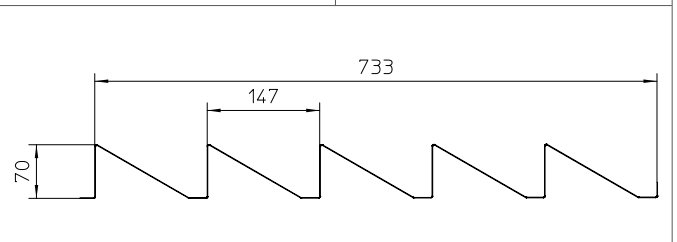


Taborsky sawtooth profile F.ZP 110/241

Spacing: 241mm	Overall width: 723mm
Height: 110mm	Length: 300-6.000mm

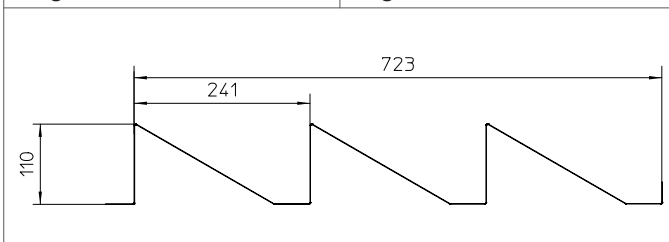


Taborsky special profile F.SO 25/218

Spacing: 218mm	Overall width: 874mm
Height: 25mm	Length: 300-6.000mm

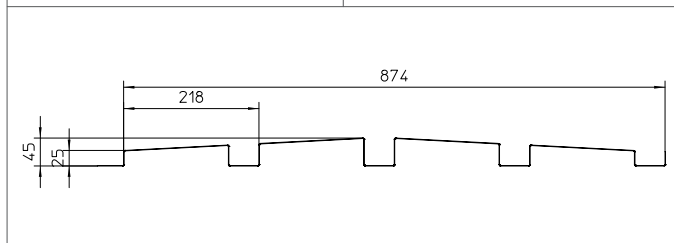


Taborsky special profile F.SO 30/225

Spacing: 225mm	Overall width: 900mm
Height: 30mm	Length: 300-6.000mm

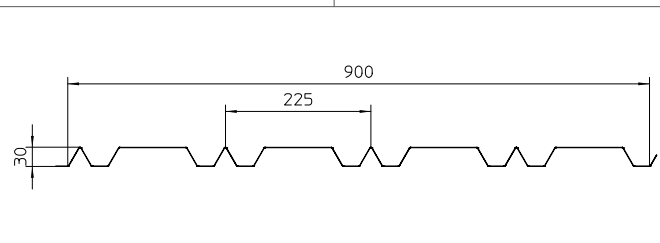


Taborsky special profile F.SO 30/270

Spacing: 270mm	Overall width: 810mm
Height: 30mm	Length: 300-6.000mm

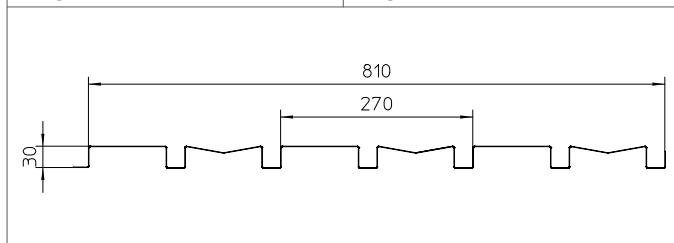


Taborsky special profile F.SO 30/288

Spacing: 288mm	Overall width: 865mm
Height: 30mm	Length: 300-6.000mm

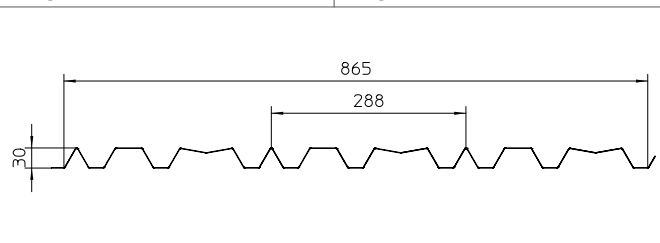


Taborsky special profile F.SO 31/112

Spacing: 112mm	Overall width: 895mm
Height: 31mm	Length: 300-6.000mm

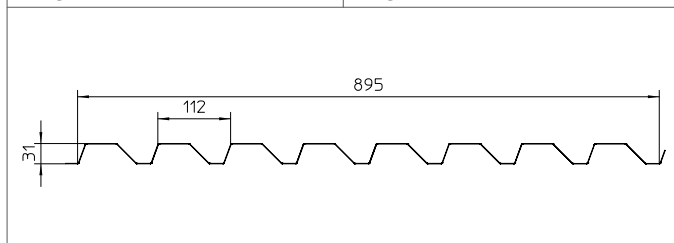


Taborsky special profile F.SO 32/439

Spacing: 439mm	Overall width: 878mm
Height: 32mm	Length: 300-6.000mm

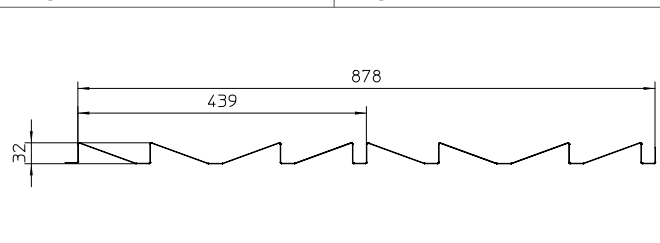


Taborsky special profile F.SO 35/453

Spacing: 453mm	Overall width: 906mm
Height: 35mm	Length: 300-6.000mm

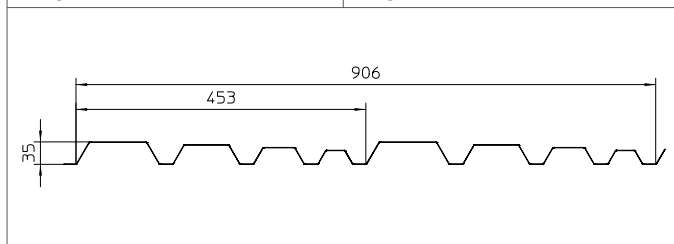


Taborsky special profile F.SO 35/760

Spacing: 760mm	Overall width: 760mm
Height: 35mm	Length: 300-6.000mm

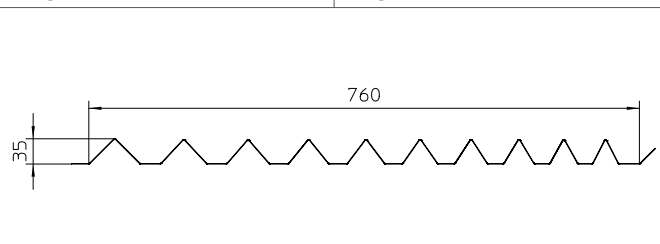


Taborsky special profile F.SO 36/296

Spacing: 296mm	Overall width: 889mm
Height: 36mm	Length: 300-6.000mm

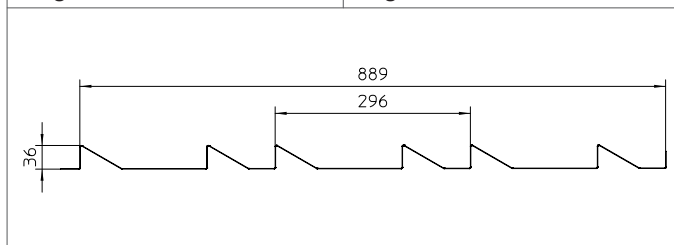


Taborsky special profile F.SO 40/168

Spacing: 168mm	Overall width: 838mm
Height: 40mm	Length: 300-6.000mm

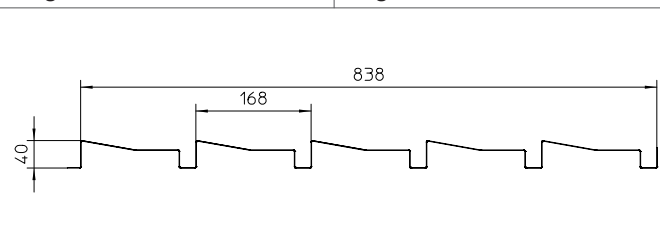


Taborsky pointed profile F.SP 11/25

Spacing: 25mm	Overall width: 855mm
Height: 11mm	Length: 300-6.000mm

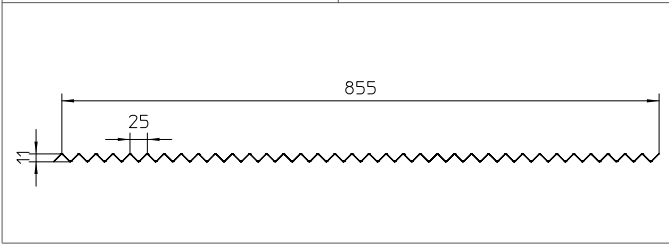


Taborsky pointed profile F.SP 33/68

Spacing: 68mm	Overall width: 819mm
Height: 33mm	Length: 300-6.000mm

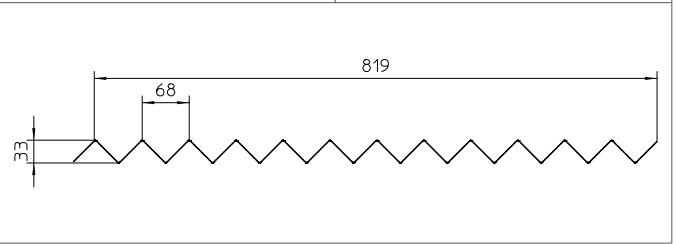


Taborsky pointed profile F.SP 34/68

Spacing: 68mm	Overall width: 741mm
Height: 34mm	Length: 300-6.000mm

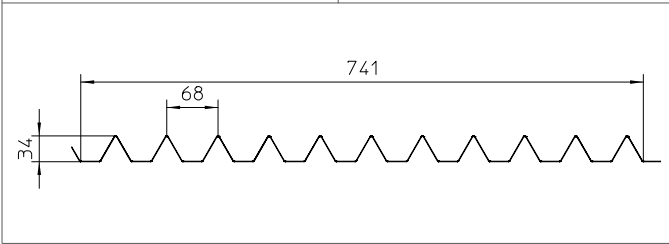


Taborsky pointed profile F.SP 34/98.198

Spacing: 98/198mm	Overall width: 990mm
Height: 34mm	Length: 300-6.000mm

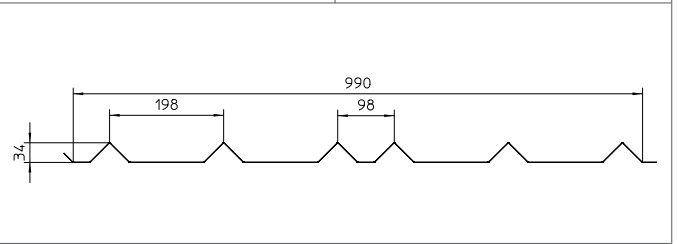


Taborsky pointed profile F.SP 34/124

Spacing: 124mm	Overall width: 990mm
Height: 34mm	Length: 300-6.000mm

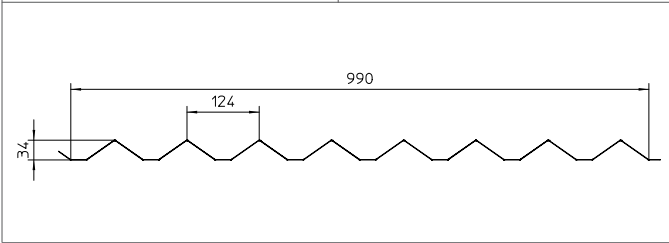


Taborsky pointed profile F.SP 51/104

Spacing: 104mm	Overall width: 828mm
Height: 51mm	Length: 300-6.000mm

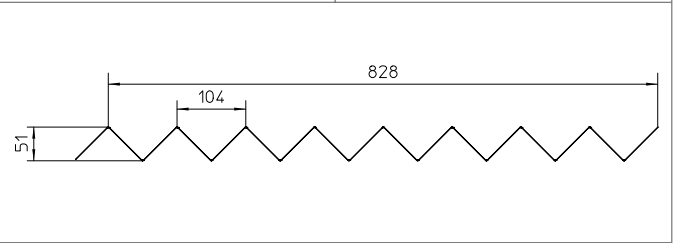


Taborsky pointed profile F.SP 51/124

Spacing: 124mm	Overall width: 869mm
Height: 51mm	Length: 300-6.000mm

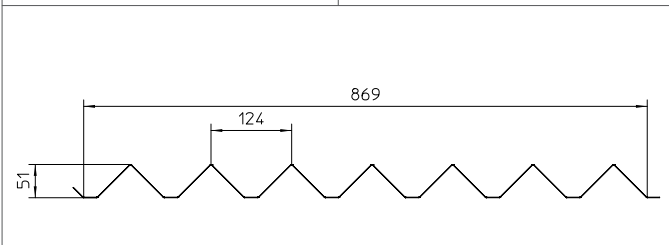


Taborsky pointed profile F.SP 90/129

Spacing: 129mm	Overall width: 647mm
Height: 90mm	Length: 300-6.000mm

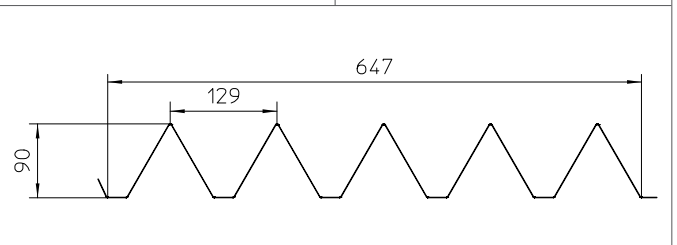


Taborsky trapezoidal profile F.TR 16/65

Spacing: 65mm	Overall width: 906mm
Height: 16mm	Length: 300-6.000mm

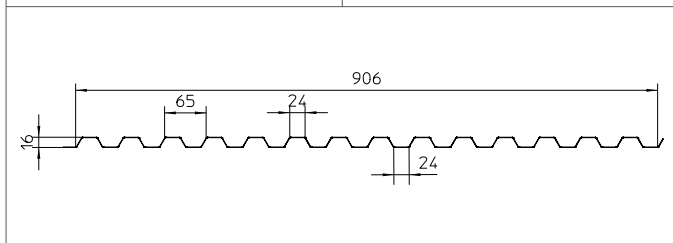


Taborsky trapezoidal profile F.TR 20/69

Spacing: 69mm	Overall width: 900mm
Height: 20mm	Length: 300-6.000mm

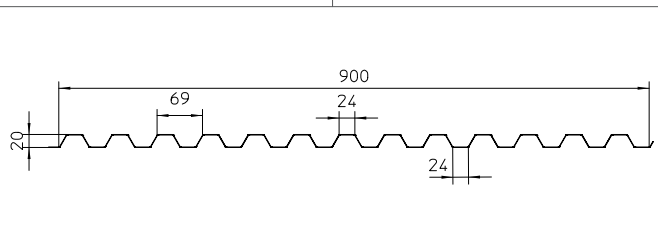


Taborsky trapezoidal profile F.TR 20/107

Spacing: 107mm	Overall width: 965mm
Height: 20mm	Length: 300-6.000mm

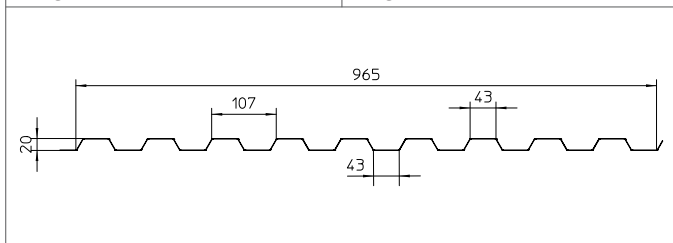


Taborsky trapezoidal profile F.TR 20/145

Spacing: 145mm	Overall width: 1017mm
Height: 20mm	Length: 300-6.000mm

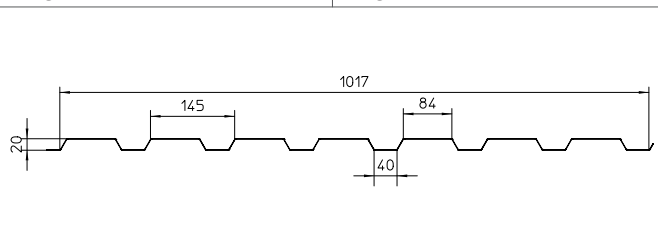


Taborsky trapezoidal profile F.TR 30/73

Spacing: 73mm	Overall width: 800mm
Height: 30mm	Length: 300-6.000mm

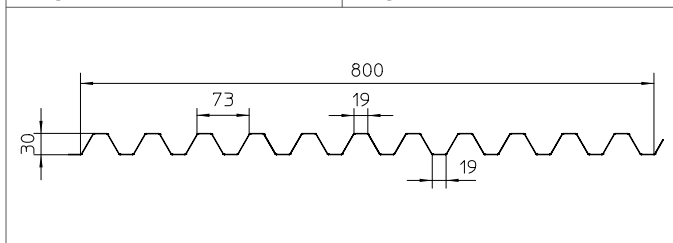


Taborsky trapezoidal profile F.TR 30/133

Spacing: 133mm	Overall width: 929mm
Height: 30mm	Length: 300-6.000mm

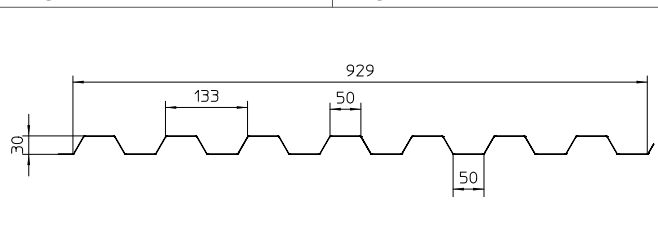


Taborsky trapezoidal profile F.TR 30/140

Spacing: 140mm	Overall width: 982mm
Height: 30mm	Length: 300-6.000mm

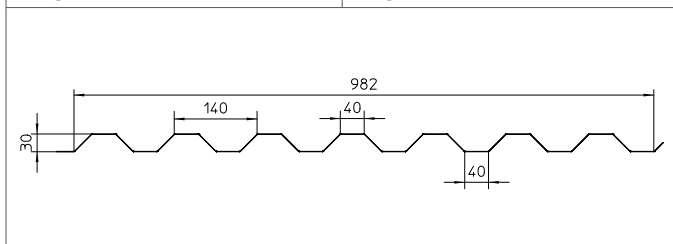


Taborsky trapezoidal profile F.TR 30/161

Spacing: 161mm	Overall width: 964mm
Height: 30mm	Length: 300-6.000mm

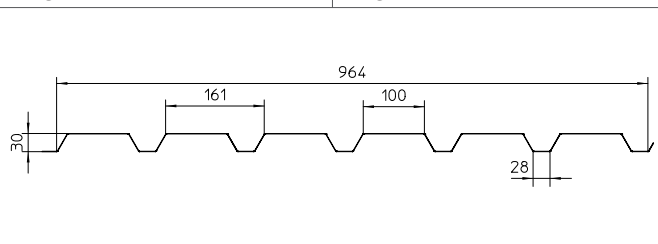


Taborsky trapezoidal profile F.TR 40/138

Spacing: 138mm	Overall width: 826mm
Height: 40mm	Length: 300-6.000mm

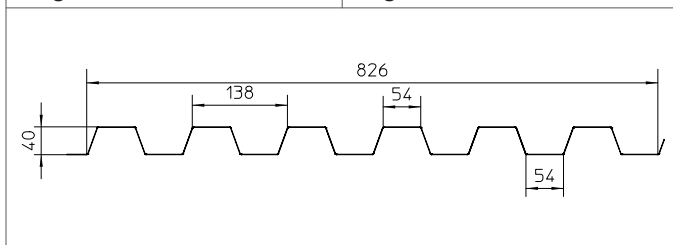


Taborsky trapezoidal profile F.TR 40/236


Spacing: 236mm	Overall width: 943mm
Height: 40mm	Length: 300-6.000mm

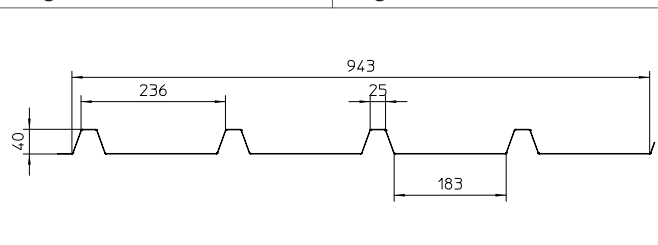


Taborsky trapezoidal profile F.TR 50/77

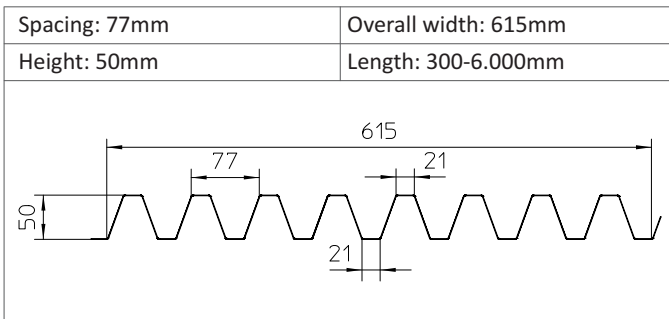


Taborsky trapezoidal profile F.TR 50/125

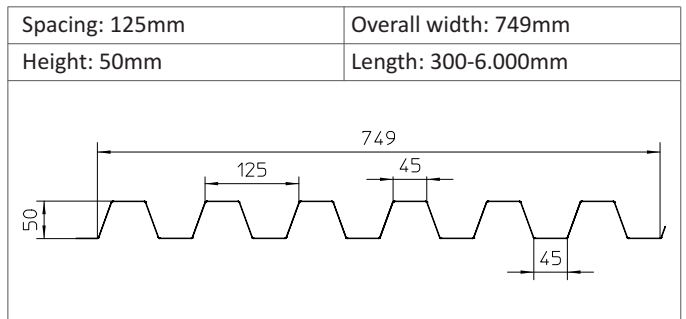


Taborsky trapezoidal profile F.TR 50/162

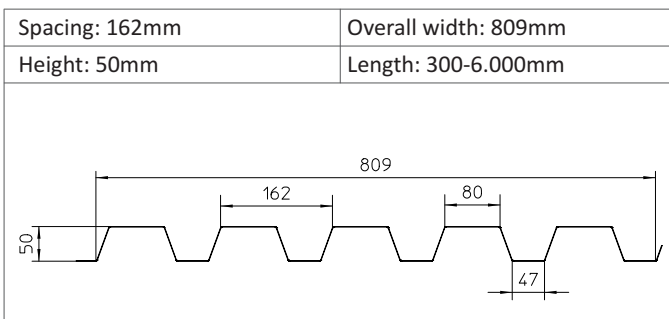


Taborsky trapezoidal profile F.TR 65/79

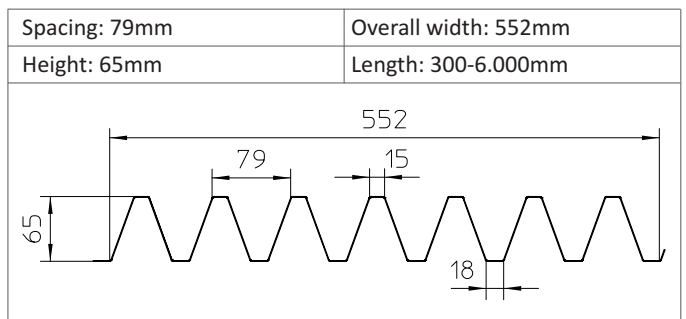


Taborsky trapezoidal profile F.TR 65/200

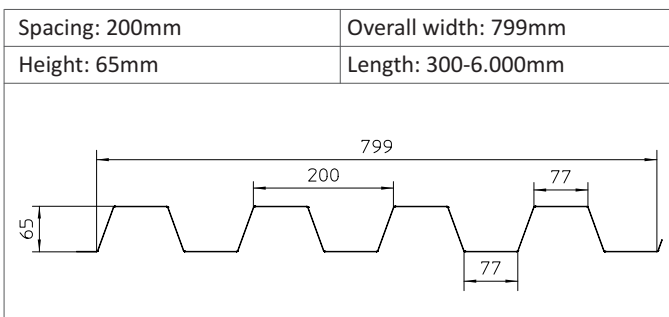


Taborsky trapezoidal profile F.TR 80/177

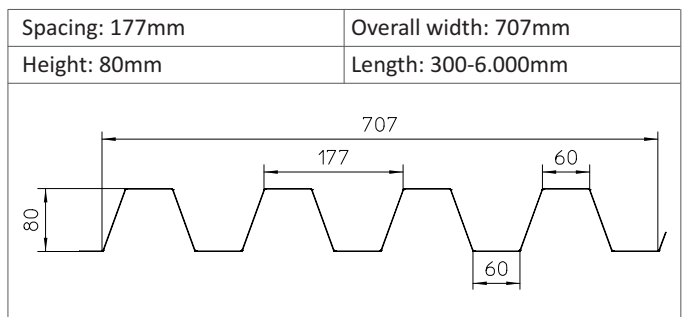

Taborsky trapezoidal profile F.TR 105/206

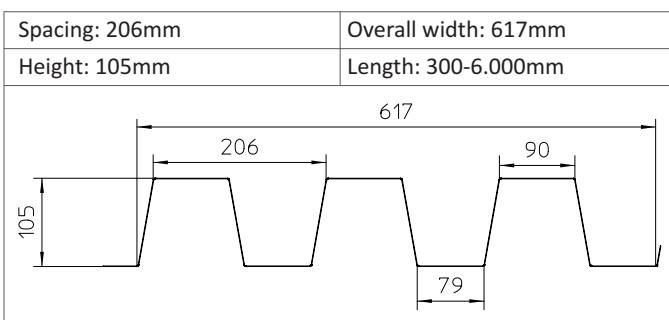

Taborsky trapezoidal profile F.TR 105/114

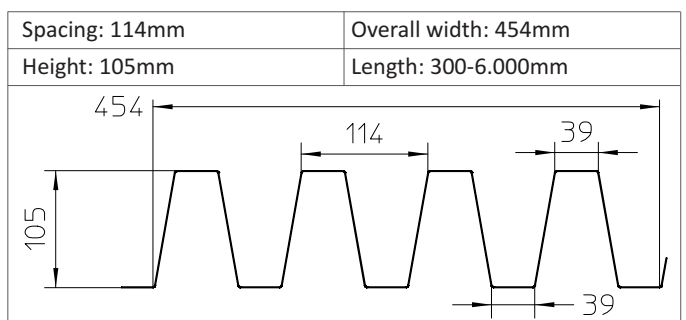

Pitches, dimensions and angles are variable and can be adapted to customer requirements.

Dimensions are approximate values and may vary according to the sheet thickness. Once the sheet thickness is known, the exact dimensions are determined.

Depending on the material, different widths are used. The configurations of the profiles can therefore vary. All profiles can also be made with conical progressions.

Special designs with different perforations are also possible. The maximum profile length is 6000 mm.

The Taborsky façade profiles can be designed with different perforations. In addition to standard perforations, individual hole patterns are also possible.


Taborsky trapezoidal profile, fully perforated




Taborsky sawtooth profile, web-punched holes



Taborsky meander profile, individually perforated

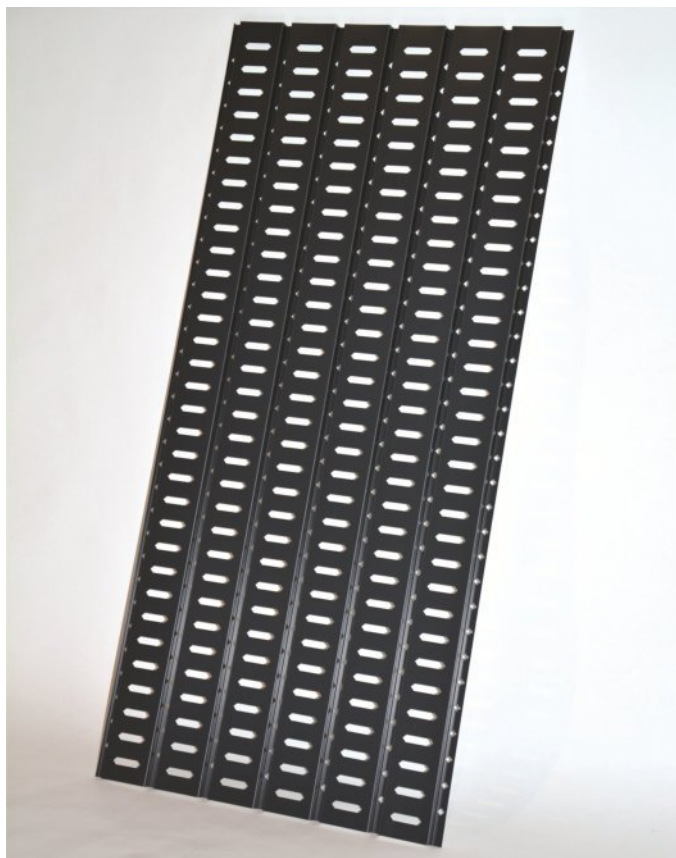

Taborsky meander profile, individually perforated

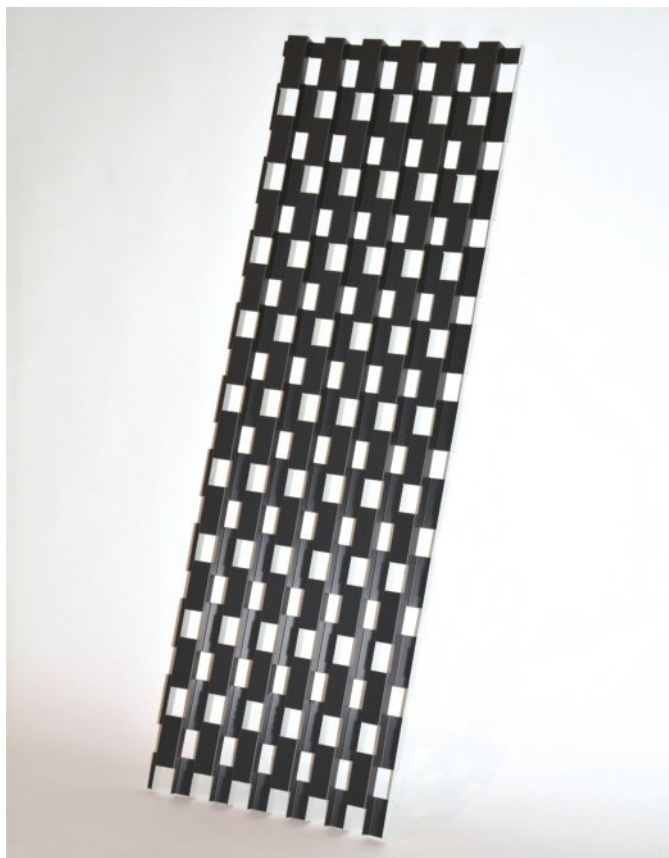

Taborsky façade profiles with conical progressions achieve special effects.

Taborsky sawtooth profiles, conical



Taborsky meander profiles, conical



Taborsky trapezoidal profile, conical



Taborsky pointed profile, conical



Together with the Taborsky façade profiles, the different materials, surfaces and colours form a distinctive, impressive and high-quality façade.

There are almost no limits to your creativity. Allow yourself to be inspired by our variety of materials.

High-quality materials are recyclable and therefore make a sustainable contribution to the protection of the environment.

Galvanised steel, coated:

Our RAL standard colours are available at short notice. Other RAL colours are available on request.



(Due to the printing technique, the colours shown are only approximations. We will be pleased to send you original colour samples on request.)

Aluminium:


Aluminium can be supplied with a strip coating, a powder coating or an anodised finish.



Aluminium 01




Aluminium 02



Aluminium 03



Aluminium 04



Aluminium 05




Aluminium 06




Aluminium c0




Aluminium c31




Aluminium c32



Aluminium c33



Aluminium c34



Aluminium c35

Stainless steel:


Stainless steel profiles are available with different surface finishes.




Stainless steel
bright




Stainless steel
mat



Stainless steel
rolledon



Stainless steel
sand




Stainless steel
top

Copper:

Copper can be delivered in bright-rolled or pre-patinated form. Alloys such as brass and bronze are also possible.



Copper classic



Copper oxyd



Copper brass



Copper bronze




Copper gold

Titanium zinc:

Titanium zinc can be prepared in different designs.



Titanium zinc
blue grey



Titanium zinc
slate grey




Titanium zinc
bright rolled


We also manufacture edged parts as connection and end profiles which match the Taborsky façade profiles. Individual edged parts are made according to your sketches and drawings. Please state all dimensions (lengths and angles) with your enquiry or order.

Production possibilities


- Edged part length up to 6000 mm
- Maximum sheet thicknesses:
 - Steel 1.5mm
 - Aluminium 2mm
 - Stainless steel 1mm
- Tapered edged parts possible
- Punching and notching possible

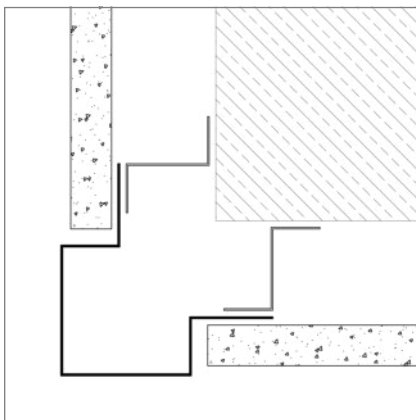


Outside corner

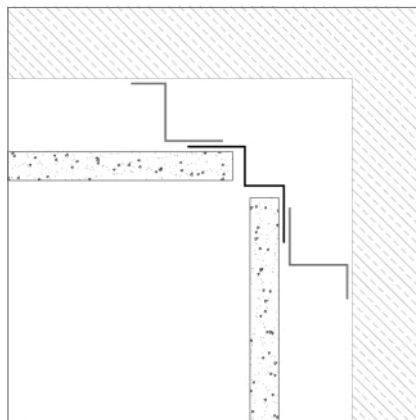


Inside corner

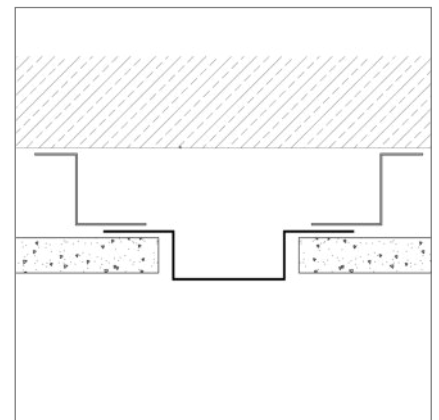


Pilaster strip

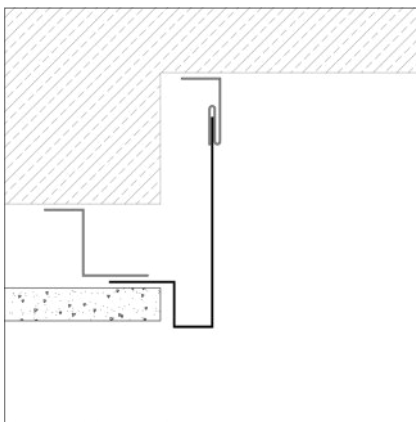


Window reveal

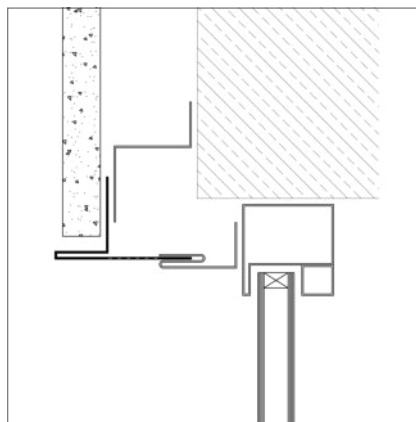


Window lintel variant 1

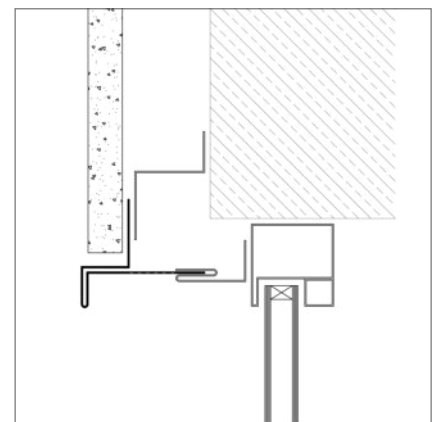


Window lintel variant 2

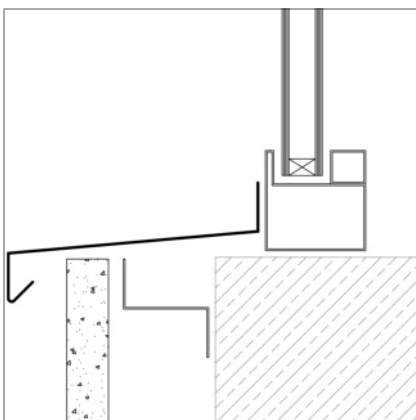

Window sill

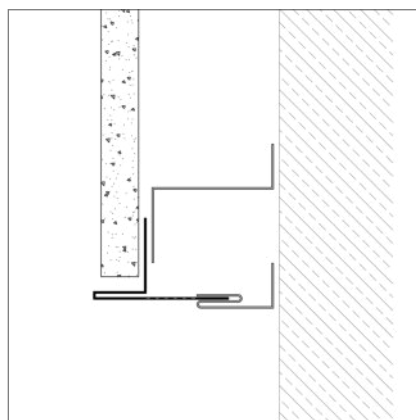


Plinth end section

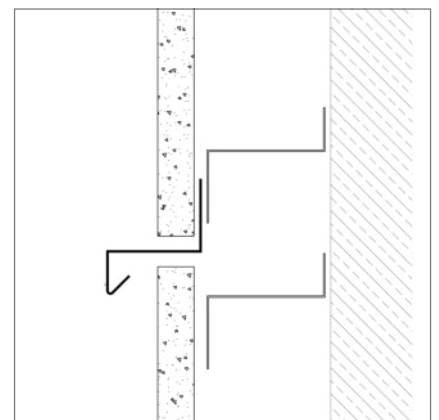


Transverse butt joint

Structure of the VHF system:

Taborsky façade profiles are specially developed for use as mounted, rear-ventilated façades. The structure of a classic mounted, rear-ventilated façade consists of the substructure, the façade insulation, the rear-ventilation gap and the façade cladding.

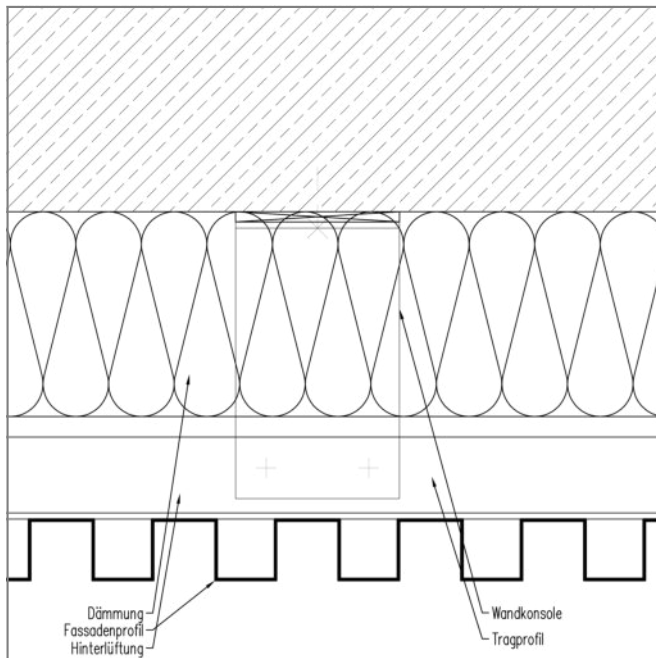

Structure of façade: horizontal section
with meander profile

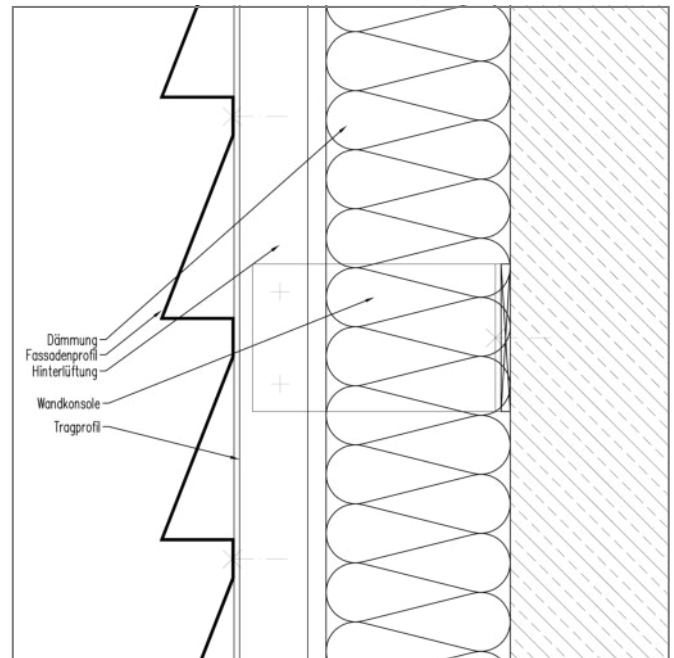

Structure of façade: vertical section
with sawtooth profile

Technical specifications of façade profiles

All our façade profiles are supplied as a self-supporting wall cladding element with the CE mark according to EN 14782. The tolerances of the profiles are regulated according to EN 508, but considerable importance is attributed to the dimensional accuracy during the manufacturing. This dimensional accuracy is monitored by our in-house production control.

Façade profiles from Taborsky are cut to the required length of between 300 mm and 6000 mm. In this way, the profiles are adapted individually to a building. The profile configuration specifies a specific construction width. We manufacture flawless profiles in different widths for flawless building closures.

Attachment, finishing

For the attachment of the Taborsky façade profiles, we recommend thread-form fasteners made of stainless steel. Due to the temperature-related expansion of the profiles, special care must be taken to ensure that the attachment is free from constraints. This form of attachment enables the profiles to be replaced quickly in the event of damage.

If profiles have to be cut, only suitable tools and machines may be used. Flying sparks and high heat generation should be avoided at all times.

Static dimensioning

In contrast to our standard trapezoidal and corrugated profiles, due to the wide variety of profiles, different materials and sheet thicknesses, there is no static pre-dimensioning or load tables for the Taborsky façade profiles. Project-specific static proof can be provided.

Taborsky

Trapezoid profiles, corrugated profiles, roof tiles

Taborsky Vertriebsges.m.b.H. & Co KG

Hans Taborsky-Straße 2

A-2440 Gramatneusiedl

Tel. +43 (0)2234 74 008

office@taborskyprofil.com

www.taborskyprofil.com

